

PCT

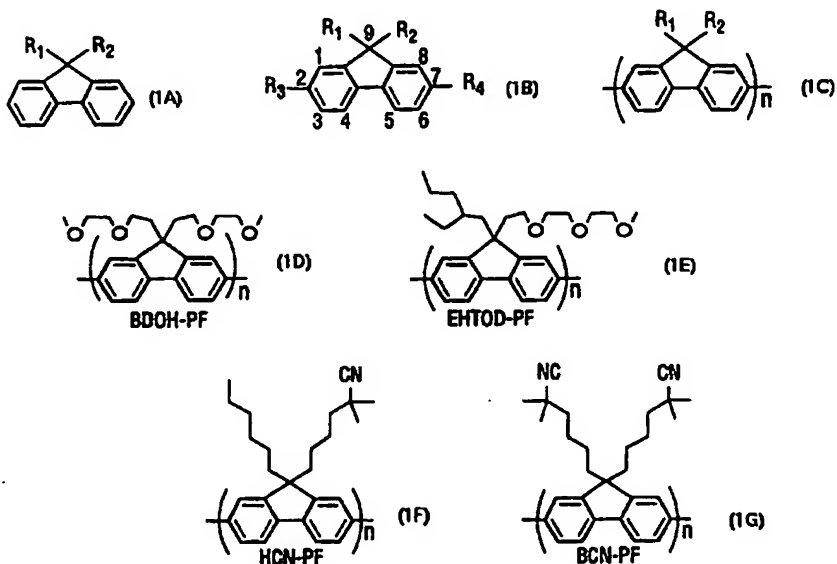
WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : H01L 33/00, C08G 61/00, C09K 11/06</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 97/33323</b> (43) International Publication Date: 12 September 1997 (12.09.97)</p>
<p>(21) International Application Number: PCT/US97/03326 (22) International Filing Date: 3 March 1997 (03.03.97) (30) Priority Data: 08/610,664 4 March 1996 (04.03.96) US (71) Applicant: UNIAX CORPORATION [US/US]; 6780 Cortona Drive, Santa Barbara, CA 93117 (US). (72) Inventors: PEI, Qibing; 773 Juniper Walk #E, Santa Barbara, CA 93117 (US). YU, Gang; 667 Camino Campana, Santa Barbara, CA 93111 (US). YANG, Yang; 260 Harvard Lane, Santa Barbara, CA 93111 (US). (74) Agent: BENZ, William, H.; Burns, Doane, Swecker &amp; Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).</p>	<p>(81) Designated States: DE, GB, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: POLYFLUORENES AS MATERIALS FOR PHOTOLUMINESCENCE AND ELECTROLUMINESCENCE



(57) Abstract

Fluorenes and polyfluorenes having one or two polar-group-containing alkyl substituents on their "9" carbon methylenes are disclosed together with the polymers' use as luminescent materials in organic light-emitting diodes and light-emitting electrochemical cells.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**POLYFLUORENES AS MATERIALS FOR PHOTOLUMINESCENCE  
AND ELECTROLUMINESCENCE**

**5    Field of the Invention**

The present invention relates to polyfluorenes and their use in photoluminescent and electroluminescent devices. More particularly it concerns new polyfluorenes and their synthesis and the use of these polyfluorenes as materials for photoluminescence and for  
10    electroluminescence in light-emitting devices including light-emitting diodes and light-emitting electrochemical cells.

**Background of the Invention**

Electroluminescent diodes (or light-emitting diodes, "LED"s) based on small emitting molecules vapor deposited as thin films from vacuum were  
15    reported by Tang et al (C.W. Tang and S.A. Van Slyke, Appl. Phys. Lett. 51, 913 (1987)); double-layer devices emitted 1000 cd/m<sup>2</sup> with an external efficiency of 1%. Such organic small molecule LEDs have been extensively developed; Kido et al.. (J. Kido, N. Nagai and Y. Okamoto, IEEE Transactions on Electron Devices 40, 1342 (1993)) reported luminance up to  
20    40,000 cd/m<sup>2</sup>.

In organic LEDs, the active organic luminescent layer(s) are sandwiched between a transparent anode, such as indium/tin-oxide (ITO) as hole-injecting contact and a low work function metal (as electron injecting contact). This structure is described in detail by D. Braun and A.J. Heeger,  
25    Appl. Phys. Lett. 58, 1982 (1991); U.S. Patent No. 5,408,109 and references therein).

Another light-emitting device is referred to as a light-emitting electrochemical cell ("LEC") and presents another approach to light-emitting

- 2 -

devices fabricated from conjugated (semiconducting) polymers (Q. Pei, G. Yu, C. Zhang, Y. Yang, A.J. Heeger, Science 269, 1086 (1995), Q. Pei and F. Klavetter, U.S. Patent Application Serial No. 08/268763). The light-emitting electrochemical cell comprises a blend of conjugated luminescent polymer and solid electrolyte, said blend serving as the active electroluminescent layer. The operating mechanism proposed for the polymer LEC involves the following steps:

- (i) Electrochemical p- and n-doping in the regions adjacent to anode and cathode, respectively, upon application of voltage greater than  $E_g/e$  where  $E_g$  is the semiconductor energy gap (HOMO to LUMO) of the semiconducting polymer and  $e$  is the electronic charge;
- (ii) Formation, in situ, of a p-n junction within the active layer.
- (iii) Radiative recombination of p- and n-type carriers within the compensated p-n junction.

Because the ions must be mobile during the *in-situ* electrochemical doping in an LEC, an ionically conductive material needs to be present. The ionically conducting material can be the semiconducting and luminescent polymer, possibly enhanced by blending with a known ion transport polymer, for example, poly(ethylene oxide), PEO. Thus, conjugated luminescent polymers which contain ethylene oxide or other ion transport polymer repeat units in their structures are of particular interest for use in LECs.

Advantages of the polymer LEC include the use of stable metals as the electrodes (for example, gold) and the ability to fabricate the polymer LEC in a planar surface configuration (G. Yu, U.S. Patent Application Serial No. 08/444998).

- 3 -

Both the polymer LED and the polymer LEC require semiconducting (conjugated) polymer in the active electroluminescent layer. Moreover, because competing non-radiative recombination of the injected electrons and holes will lead to reduced efficiency for electroluminescence, preferred  
5 semiconducting (conjugated) polymers must exhibit a high quantum efficiency for photoluminescence. Equally important, preferred semiconducting (conjugated) polymers must exhibit high stability, particularly stability against degradation because the shelf life and operating life of LEC and LED devices is ultimately dependent upon the stability of  
10 the active electroluminescent layer.

Several classes of luminescent polymers have been disclosed in the art heretofore. These include, for example, poly[1,4-phenylene vinylene], PPV (J.H. Burroughs, D.D.C. Bradley, A.R. Brown, R.N. Marks, K. MacKay, R.H. Friend, P. L. Burns and A.B. Holmes, Nature 347, 539 (1990)) and  
15 soluble derivatives of PPV, such as MEH-PPV (U.S. Patent No. 5,189,136) and BCHA-PPV (U.S. Patent Application Serial No. 07/626463), PPPV (C. Zhang, H. von Seggern, K. Pakbaz, B. Kraabel, H.-W. Schmidt and A.J. Heeger, Synth.Met. 62, 35 (1994) and references therein) and the like, the soluble derivatives of polythiophene, for example the poly(3-alkylthiophenes)  
20 (D. Braun, G. Gustafsson, D. McBranch, J. Appl. Phys. 72, 564, (1992)), the soluble derivatives of polyphenylene (L. Hamaguchi and K. Yoshino, Jpn. J. Appl. Phys. L587 (1995)), and other semiconducting conjugated polymers which exhibit photoluminescence; blends of such semiconducting and luminescent conjugated polymers in hole-transporting or electron  
25 transporting polymers or molecules (C. Zhang H. von Seggern, K. Pakbaz, B. Kraabel, H.-W. Schmidt and A.J. Heeger, Synth. Met. 62, 35, (1994);

- 4 -

C. Zhang, S. Hoyer, K. Pakbaz, F. Wudl and A.J. Heeger, J. Electron. Mater. 23, 453 (1994)), and heterojunctions utilizing layers of semiconducting and luminescent conjugated polymers as donors and acceptors. Other materials proposed in the art include the poly[para-phenylene]s, PPP, and the polythiophenes. The use of soluble derivatives of these basic structures enables relatively simple device fabrication by processing the active layer from solution (A.J. Heeger and D. Braun, U.S. Patent No. 5,408,109 and references therein).

Alkyl and dialkyl derivatives of polyfluorene have also been used in polymer LEDs (M. Fukuda and K. Yoshino, Japanese Patent No. 02,269,734, Y. Ohmori, M. Uchida, K. Muro and K. Yoshino, Japanese Journal of Applied Physics 30, L1941(1991)).

Although a number of luminescent semiconducting polymers are known in the art, there is a specific need for stable materials with a sufficiently large electronic band gap that they emit blue light. Blue-emitting LEDs and LECs have been disclosed (G. Grem, G. Leditzky, B. Ullrich, and G. Leising, Advanced Materials 4, 36(1992), Y. Ohmori, M. Uchida, K. Muro and K. Yoshino, Japanese Journal of Applied Physics 30, L1941(1991), I.D. Parker, Q. Pei, and M. Morrocco, Appl. Phys. Lett. 65, 1272(1994)), but stable blue-emitting materials which yield LEDs and/or LECs with long lifetimes are not known.

Thus, there is a need for stable, large energy gap, semiconducting (conjugated) polymers which exhibit a high quantum efficiency for photoluminescence. In order to use such materials in light-emitting devices, it is necessary to fabricate optical quality thin films of the semiconducting, luminescent polymers. Thus, there is a need for stable, large energy gap

- 5 -

semiconducting (conjugated) polymers which exhibit a high quantum efficiency for photoluminescence and which are processible from solution into optical quality thin films. Moreover there is particular need for conjugated luminescent polymers which are ionically conductive, for  
5 example, with ethylene-oxide repeat units present in their structures, because such materials are of particular interest for use in polymer LECs.

Stable, high quantum efficiency photoluminescent polymers are also important for applications which do not involve electroluminescence. Such materials have been demonstrated to be useful, for example, in dye lasers  
10 (D. Moses, U.S. Patent Application Serial No. 07/904,731). More generally, luminescent materials with high photoluminescent efficiency are useful in a variety of display applications.

#### Summary of the Invention

It has now been found that polyfluorenes based upon fluorene repeat  
15 units in which the fluorene bridge "9" methylene contains at least one polar-substituted alkyl are excellent photoluminescent materials. These polymers are depicted by the first structure in Fig. 1 in which R1 is an aliphatic group which includes at least one heteroatom-containing polar group and R2 is either hydrogen, an alkyl or an aliphatic group which includes at least one  
20 heteroatom-containing polar group. The monomeric fluorenes upon which these polymers are based have also been discovered as have light emitting diodes and light emitting electrochemical cells incorporating the polymers.

In one aspect this invention provides fluorene compounds of the generic formula (A) of Fig.1 wherein R1 is an aliphatic including at least  
25 one heteroatom-containing polar group and R2 is either hydrogen, an alkyl

- 6 -

or an aliphatic group including at least one heteroatom-containing polar group.

In an additional aspect this invention provides polymerizable fluorene compounds of the generic formula (B) of Fig.1 wherein R1 and R2 are as  
5 already defined and R3 and R4 are each polymerization-enabling leaving groups.

In a further aspect this invention provides polyfluorenes having the repeat mer unit of generic formula (C) of Fig. 1 wherein R1 and R2 are as already defined. These materials can be homopolymers or copolymers and  
10 will have values for n ranging from about 3 to about 10,000.

In a further aspect this invention provides light-emitting organic solid state devices in which a polyfluorene of the invention is incorporated into a layer of an electrically activated luminescent organic polymer positioned between a hole-injecting electrode and an electron-injecting electrode. These  
15 devices can be configured as light-emitting diodes or as light-emitting electrochemical cells.

Additionally, this invention can take the form of a method for generating light by applying a solid-state device activating voltage across the hole injecting electrode and electron injecting electrodes of one of the light-  
20 emitting devices of the invention, thereby giving rise to light emission from the device's layer of electroluminescent organic polymer and detecting the emitted light.

### Detailed Description of the Invention

#### Brief Description of the Drawings

25 This invention will be described with reference being made the



- 7 -

drawings in which:

Fig. 1 is a series of molecular structures illustrating

(A) a generic structure for the fluorenes of the invention,

(B) a generic structure for the polymerizable fluorenes of the  
5 invention,

(C) a generic formula for the polyfluorenes of the invention,

and

(D-G) formulae for specific polyfluorenes of the invention.

Fig. 2 is a series of absorption spectra of the polyfluorenes shown in  
10 Fig. 1.

Fig. 3 is a graph of current vs voltage and light emission intensity vs  
voltage for an LED made with BDOH-PF. This LED has a ITO/BDOH-  
PF/Ca structure.

Fig. 4 is an emission spectrum from a polymer LED fabricated from  
15 BDOH-PF. This LED has a ITO/BDOH-PF/Ca structure.

Fig. 5 is a graph of light vs current characteristics of a BDOH-PF-  
containing LEC. The BDOH is admixed with small amount of PEO (ratio  
of 10 parts BDOH-PF to one part PEO).

Fig. 6 is a white color electroluminescence spectrum for light  
20 emission from a device of the invention. Fig. 6 also includes the spectrum  
of the same emission measured through RGB color filters.

### Description of the Preferred Embodiments

#### The Fluorenes

The fluorenes of the invention are depicted in Fig. 1 as A. In A, R1  
25 is an aliphatic group which includes at least 1 heteroatom-containing polar

- 8 -

group.

R1 typically contains at least about 1 carbon in its aliphatic portion and especially from 1 to about 30 carbon atoms and more preferably 1 to 20 carbon atoms. A "lower" aliphatic group or alkyl is from about 1 to about 5 15 atoms in length. The aliphatic portion of R1 can be saturated (alkyl) or olefinically unsaturated (alkenyl) and can be linear or branched. The heteroatom groups can be pendant from the aliphatic chains and/or can interrupt the aliphatic chains. In the case of interruption, the above-recited carbon lengths are totals for both sides of the interruptions. The aliphatic 10 portion may contain up to 3 olefinic unsaturations.

The polar groups present in R1 can be selected generally from those oxygen-, nitrogen-, sulfur- and phosphorus-containing groups known in the art. Representative oxygen-containing groups include ether, hydroxyl, ester, acid and the like. Representative nitrogen-containing groups include amine 15 (primary, secondary and tertiary), cyano, amide, imine and the like. Representative sulfur-containing groups include sulfonate, sulfate, sulfite, sulfide, thiol, mercapto and the like. Representative phosphorus-containing groups include, phosphate, phosphine, phosphazene and the like. The polar groups can present cyclization of a portion of the R1 group such as occurs 20 when cyclic ethers are present.

The R1 group can include mixtures and combinations of these substituents, as well.

The number of polar groups is at least 1 and typically is 1 to 3 with the exception of ether oxygens where the number is often larger ranging 25 from 1 to 10 and especially 2 to 5.

Preferred R1 groups are cyano-substituted alkyls containing 1 or 2

- 9 -

cyanos on 4 to 10 carbon atom linear or branched alkyls and polyethers containing 2 to 5 ether oxygens separated from one another by 1, 2 or 3 carbon alkyl bridges. These latter materials are particularly preferred for use in LEC structures where the polyether groups present in the R1 chains  
5 are polyoxymethylenes, polyethylene oxides or polypropylene oxides all of which are known to be polymer electrolytes and thus suitable for promoting ionic transport in the material. Other polar functionality in the R1 group which promotes ion transport is preferred for fluorene groups destined for use as polymers in the LEC structures.

10 R2 can be identical to R1 or it can be a different polar group-containing aliphatic group or it can be hydrogen or an alkyl. If an alkyl, R2 can have from about 1 to about 30 carbons and preferably 1 to about 15 carbons.

Examples of alkyl R2s include n and iso butyl, pentyls, both linear  
15 and branched, hexyls, octyls, including 2-ethyl hexyl, up through hexadecyls and beyond with and without olefinic unsaturation.

When these fluorenes are polymerized, the R1 and R2 groups essentially become sidechains off of the polyfluorene core. Thus, the final selection of R1 and R2 groups should take into account the role these  
20 sidechains may play in the properties of the final polymer. These properties include electronic properties, solubility properties, processibility properties, film-forming properties, to enhance or to reduce interchain interaction, to induce solubility in organic solvents, to induce compatibility in blends with host polymers, to induce high dielectric constant so as to solvate ions, to  
25 enhance ionic mobility, etc.

- 10 -

### The Polymerizable Fluorenes

The polyfluorenes are commonly produced by polymerizing preformed fluorene units of Formula (A). To do this, the fluorenes of Formula (A) are typically further derivatized to introduce polymerization-enabling leaving groups. These groups are removed during polymerization. Bromo groups are conveniently introduced into the fluorenes and are very suitable leaving groups although other art-known polymerizable groups can be incorporated. The fluorene monomers in polymerizable form are depicted in Formula (B) wherein R3 and R4 are the leaving groups.

### The Polyfluorenes

The polyfluorenes of this invention are depicted generically by Formula (C) in Fig. 1. These polyfluorenes typically have at least 3 repeat units (i.e. n equals at least 3) and can be very large molecules with n ranging as high as 10,000 or greater.

Molecular weight is not seen to be critical and may vary as desired to achieve other desired properties such as solubility, processibility, formability and the like.

The polyfluorenes may be homopolymers. They also may be copolymerized with other monomers. Usually copolymerization is used to reduce the cost of materials by reducing the fluorene content. Representative copolymer materials include olefin units such as ethylene, propylene or the like, aromatic units such as styrene, ester units and the like.

If copolymeric units are present it will be appropriate to select the leaving groups R3 and R4 to accommodate the comonomers in the

- 11 -

copolymerization.

The relative weight proportion of comonomer units will range from 100:0 (for a pure polyfluorene homopolymer) to about 10:90 for a highly diluted material. This lower level can be varied, as desired, of course.

5                    Preparation

The fluorenes and polyfluorenes are prepared as illustrated in the Examples with feed stocks being varied as will be apparent to achieve the range of materials contemplated.

Device Configurations

10            Generally, polymer light-emitting diodes comprise an electron injecting contact, for example a relatively low work function metal (Ca, Al, or the like) as one electrode on the front of a semiconducting and luminescent conjugated polymer film comprising the present polyfluorenes. This luminescent polymer film has, in turn been deposited on a substrate  
15    which has been partially coated with a layer of transparent conducting material with higher work function (high ionization potential) to serve as the second (transparent) electron-withdrawing electrode. This configuration is well known for polymer LEDs (D. Braun and A.J. Heeger, Appl. Phys. Lett. 58, 1982 (1991)). In this configuration, any low work function (low  
20    ionization potential) conducting material can be used as the electron injecting contact. In addition, any relatively high work function (high ionization potential) transparent conducting material, such as for example, ITO or polyaniline (PANI) in the conductive emeraldine salt form, can be used as the second (transparent) electron-withdrawing (or hole injecting) electrode.

- 12 -

Typical film thicknesses of the polyfluorene-containing semi-conductive and luminescent polymers range from about a hundred Ångstrom units to a millimeter or so. More commonly thickness is in the range of from a 200 Ångstroms to a 10,000 Ångstroms. Although the active film thicknesses are not critical, device performance can typically be improved by using the thinner films. The polyfluorenes can be the sole luminescent polymer in the film or it can be combined with other materials known heretofore.

The low work function metal electrode is typically vacuum evaporated onto the top surface of the active organic layer. Useful metals are well known in the art and include, for example pure metals such as Ca, Al, and In, as well as low work function metal alloys such as Ag:Mg, and Al:Li. Any low work function (low ionization potential) conducting material can be used in place of a conventional metal as the electron injecting contact. The thickness of the electron injecting electrode film is not critical and can be adjusted to achieve the desired surface resistance (surface resistance or sheet resistance is defined as the resistivity divided by the thickness).

In light-emitting electrochemical cell configurations an ionically conductive species is present with the polyfluorene luminescent polymer. The proportions of polyfluorene and ionic species source in an LEC active layer can vary throughout the range which permits light to be emitted, for example from about 0.1:0.9 to about 0.9:0.1 on a weight basis. At the present time ranges of from about 0.2:0.8 to about 0.8:0.2 and especially from about 0.3:0.7 to about 0.7:0.3 are preferred.

Ionic species may be provided by incorporation in the composite material of an electrolyte, by which is meant an ionically bound positively

- 13 -

charged cation and negatively charged anion which ionize in a solvent or other suitable medium to render said solvent or medium electrically conducting.

In electrochemical light emitting devices, suitable representative salts  
5 have cations which include the singly ionized alkali metals, ions of polyvalent metals, metallo-organic cations, and organic cations, and the like.

In a preferred embodiment, the ionic species are provided by a polymer electrolyte. Polymer electrolytes are well known in the art (see, e.g., K.M. Abraham, Highly Conductive Polymer Electrolytes in  
10 Applications of Electroactive Polymers, B. Scrosati ed., Chapman & Hall, London, 1993) and consist of salt complexes of high polymers containing optimally spaced electron donor atoms or moieties which coordinately bond with the cation of the salt. Suitable examples of such polymers include  
15 poly(ethylene oxide), poly(propylene oxide), poly(dimethyl siloxane), polyoxymethylene, poly(epichlorohydran), poly(phosphazene), poly[bis-(methoxyethoxyethoxy)phosphazene], polyoxetane, polytetrahydrofuran, poly(1,3-dioxolane), poly(ethylene imine), poly(ethylene succinate), poly(ethylene sulfide), poly(propylene sulfide), poly[oligo(oxyethylene) methacrylate], poly[oligo(oxyethylene) cyclotrisphosphazene] and the like,  
20 and mixtures thereof. These materials can be added to the luminescent layer. Their functionality can, at least in part, be provided by the polar group-containing R1 and R2 groups present on the polyfluorene. It will be appreciated that the polar groups present in R1 and R2 encompass the mer units found in these ionically conductive polymers and thus the same  
25 functionality can be provided directly by the sidechains.

The light-emitting devices have contact layers. These layers serve as

- 14 -

electrodes for applying the powering voltage across the polyfluorene-containing luminescent layer. One of these contacts is typically a low work function layer to serve as an electron-injecting layer. The other is of higher work function and is the hole injector. These electrodes may be placed in  
5 contact with the layer of polyfluorene material by processing the polyfluorene into a layer on a substrate bearing one electrode and then depositing a second electrode on the free surface of the layer.

Any material capable of forming an electrical pathway for the powering voltage to the polyfluorene layer may be employed as these contact  
10 layers. Typical materials include metals such as aluminum, silver, platinum, gold, palladium, tungsten, indium, copper, iron, nickel, zinc, lead and the like; metal oxides such as lead oxide, tin oxide, and the like; graphite; doped inorganic semiconductors such as silicon, germanium, gallium arsenide, and the like; and doped conducting polymers such as polyaniline,  
15 polypyrrole, polythiophene, and the like.

In the light emitting devices at least one electrode consists of a semitransparent conductive material such as indium tin oxide, tin oxide, nickel, gold, doped polyaniline, doped polypyrrole, and the like. Preferably, such electrodes have a sheet resistance of about 10 to 1000 ohms  
20 per square and an optical transmittance of about 80% or greater for wavelengths longer than about 400 nm. Suitable substrates may be rigid or mechanically flexible and include glass, metals and alloys, and plastics.

ITO has been the most commonly used transparent electrode for polymer LED's. On the other hand, PANI, in the emeraldine salt form  
25 prepared according to U.S. Patent Nos. 5,232,631 and 5,470,505, U.S. Patent Application Serial Nos. 07/800,555 and 07/800,559, and in Appl.



- 15 -

Phys. Lett. 60, 2711 (1992) has a higher work function than ITO (Y. Yang and A.J. Heeger, Appl. Phys. Lett. 64, 1245 (1994)), and therefore provides better hole injection into the polymer active layer. However, the surface resistance of a very thin PANI film often is too high for some applications.

- 5 In order to avoid significant voltage drop in the electrode, it is desirable to decrease the surface resistance of the anode to less than about 100 ohms/square. This can be achieved using a thicker layer (greater than 2500 Å) of PANI.

- Both the polymer LED and the polymer LEC require semiconducting (conjugated) polymer in the active electroluminescent layer. Moreover, because competing non-radiative recombination of the injected electrons and holes will lead to reduced efficiency for electroluminescence, preferred semiconducting (conjugated) polymers must exhibit a high quantum efficiency for photoluminescence. Equally important, preferred semiconducting (conjugated) polymers must exhibit high stability, particularly stability against degradation because the shelf life and operating life of LEC and LED devices is ultimately dependent upon the stability of the active electroluminescent layer. The present polyfluorenes offer these advantages.

- 20 Although a number of luminescent semiconducting polymers are known in the art, there is a specific need for stable materials with a sufficiently large electronic band gap that they emit blue light. Blue-emitting LEDs and LECs have been disclosed (G. Grem, G. Leditzky, B. Ullrich, and G. Leising, Advanced Materials, 4, 36(1992), Y. Ohmori, M. Uchida, 25 K. Muro and K. Yoshino, Japanese Journal of Applied Physics, 30, L1941(1991), I.D. Parker, Q. Pei, and M. Morrocco, Appl. Phys. Lett.,

- 16 -

65, 1272(1994)), but stable blue-emitting materials which yield LEDs and/or LECs with long lifetimes are not known. The present materials offer this, as well.

Stable, high quantum efficiency photoluminescent polymers are also  
5 important for applications which do not involve electroluminescence. Such materials have been demonstrated to be useful, for example, in dye lasers (D. Moses, U.S. Patent Application Serial No. 07/904,731). More generally, luminescent materials with high photoluminescent efficiency are useful in a variety of display applications.

10 Thus, there is a need for stable, large energy gap, semiconducting (conjugated) polymers which exhibit a high quantum efficiency for photoluminescence. In order to use such materials in light-emitting devices, it is necessary to fabricate optical quality thin films of the semiconducting, luminescent polymers. Thus, there is a need for stable, large energy gap  
15 semiconducting (conjugated) polymers which exhibit a high quantum efficiency for photoluminescence and which are processible from solution into optical quality thin films. Moreover there is particular need for conjugated luminescent polymers with ethylene-oxide side chains, because such materials are of particular interest for use in polymer LECs. The  
20 present polyfluorenes address all of these needs.

## EXAMPLES

This invention will be further described by the following Examples:

### EXAMPLE 1

Synthesis of 9,9-bis(3,6-dioxahexyl)-fluorene:

25 7.05 g of butyllithium dissolved in 44 ml of hexane was slowly added

- 17 -

in 5 minutes into 18.28 g of fluorene dissolved in 150 ml of anhydrous tetrahydrofuran at -50 °C under nitrogen protection. The mixture was stirred at -30 ~ 15 °C for 1 hour before it was cooled again to -40 ~ -50 °C. Then, 15.23 g of 1-chloro-2-(2-methoxyethoxy)-ethane was added in 5 minutes. The mixture was subsequently stirred for 2 hours while the temperature was gradually increased to 22 °C. The main product in the solution was 9-(3,6-dioxaheptyl)-fluorene as detected by GC-MS. This solution was then cooled to -50 °C, and 7.1 g of butyllithium dissolved in 44 ml of hexane was slowly added in 5 minutes under nitrogen protection. The mixture was stirred at -30 to -15 °C for 1 hour before it was cooled again to -40 to -50 °C. Then, 15.30 g of 1-chloro-2-(2-methoxyethoxy)-ethane was added during 5 minutes. The mixture was subsequently stirred for 5 hours at 22 °C, dispersed in water, and extracted with ether. The ethereal solution was washed with water and brine, dried with magnesium sulfate, and evaporated. The residue was distilled to collect 37.1 g (91 %) of colorless liquid at 160 °C/0.08 mm Hg. MS (m/z): 370 (M<sup>+</sup>), 219, 191, 178, 89, 59.

## EXAMPLE 2

Synthesis of 9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-fluorene:

7.69 g of butyllithium dissolved in 48 ml of hexane was slowly added during 5 minutes into 20.0 g of fluorene dissolved in 150 ml of anhydrous tetrahydrofuran at -50 °C under nitrogen protection. The mixture was stirred at -30 to 15 °C for 1 hour before it was cooled again to -40 to -50 °C. Then, 23.17 g of 2-ethylhexyl bromide was added in 5 minutes. The mixture was subsequently stirred for 2 hours while the temperature was gradually increased to 22 °C. The main product in the solution was 9-(2-

- 18 -

ethylhexyl)-fluorene as detected by GC-MS. This solution was then cooled to -50 °C, and 7.7 g of butyllithium dissolved in 48 ml of hexane was slowly added in 5 minutes under nitrogen protection. The mixture was stirred at -30~15 °C for 1 hour before it was cooled again to -40 to -50 °C. Then, 23.75 g of 1-(2-chloroethoxy)-2-(2-methoxyethoxy)-ethane was added in 5 minutes. The mixture was subsequently stirred for 15 hours at 22 °C, dispersed in water, and extracted with ether. The ethereal solution was washed with water and brine, dried with magnesium sulfate, and evaporated. The residue was distilled to collect 45.5 g (89%) of colorless liquid at 190 °C/0.12 mm Hg. MS (m/z): 424 (M<sup>+</sup>), 277, 205, 191, 178, 165, 133, 103, 59.

### EXAMPLE 3

Synthesis of 9-hexyl-9-(5-cyano-5-methylhexyl)-fluorene:

2.4 g of butyllithium dissolved in 15 ml of hexane was slowly added during 5 minutes into 6.0 g of fluorene dissolved in 40 ml of anhydrous tetrahydrofuran at -50 °C under nitrogen protection. The mixture was stirred at -30 to 15 °C for 1 hour before it was cooled again to -40~-50 °C. Then, 6.0 g of 1-bromohexane was added in 5 minutes. The mixture was subsequently stirred for 2 hours while the temperature was gradually increased to room temperature. The mixture was then cooled to -50 °C, and 2.4 g of butyllithium dissolved in 15 ml of hexane was slowly added in 5 minutes under nitrogen protection. The mixture was stirred at -30 to 15 °C for 1 hour before it was cooled again to -40~-50 °C. Then, 7.6 g of 6-bromo-2,2-dimethylhexanenitrile was added in 5 minutes. The mixture was subsequently stirred for 15 hours at room temperature, dispersed in water,

- 19 -

and extracted with ether. The ethereal solution was washed with water and brine, dried with magnesium sulfate, and evaporated. The residue was distilled to collect 12.4 g (92%) of light yellow liquid. MS (m/z): 373 ( $M^+$ ), 288, 249, 217, 191, 179, 165.

5           EXAMPLE 4

Synthesis of 9,9-bis(5-cyano-5-methylhexyl)-fluorene:

2.4 g of butyllithium dissolved in 15 ml of hexane was slowly added during 5 minutes into 6.0 g of fluorene dissolved in 40 ml of anhydrous tetrahydrofuran at -50 °C under nitrogen protection. The mixture was  
10 stirred at -30 to 15 °C for 1 hour before it was cooled again to -40 to -50 °C. Then, 7.6 g of 6-bromo-2,2-dimethylhexanenitrile was added in 5 minutes. The mixture was subsequently stirred for 2 hours while the temperature was gradually increased to 22 °C. The mixture was then cooled to -50 °C, and 2.4 g of butyllithium dissolved in 15 ml of hexane was slowly added in 5  
15 minutes under nitrogen protection. The mixture was stirred at -30 ~ 15 °C for 1 hour before it was cooled again to -40 ~ -50 °C. Then, 7.6 g of 6-bromo-2,2-dimethylhexanenitrile was added in 5 minutes. The mixture was subsequently stirred for 14 hours at 22 °C, dispersed in water, and extracted with ether. The ethereal solution was washed with water and brine, dried with  
20 magnesium sulfate, and evaporated. The residue was vacuum distilled to remove impurities. 14.1 g (95%) of light yellow liquid was obtained. MS (m/z): 412 ( $M^+$ ), 288, 207, 191, 178, 165.

- 20 -

#### EXAMPLE 5

Synthesis of 9,9-bis(3,6-dioxaheptyl)-2,7-dibromofluorene:

96.0 g of bromine was slowly added into 37.0 g of 9,9-bis(3,6-dioxaheptyl)-fluorene dissolved in 100 ml of N,N-dimethylformamide containing a few crops of iron. After 5 minutes, 3 g of sodium hydroxide dissolved in 20 ml of water was added dropwise. The mixture was then dispersed in ether, repeatedly washed with water, dried with magnesium sulfate, and evaporated. The residue was column chromatographed through silica gel using hexane/ether (1:1) as the eluent. After the solvent was evaporated, 38.0 g (72%) of light yellow liquid was obtained. MS (m/z): 528 (M<sup>+</sup>), 379, 350, 298, 269, 217, 202, 189, 176, 89, 59.

#### EXAMPLE 6

Synthesis of 9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-2,7-dibromofluorene:

24.0 g of bromine was slowly added into 21.2 g of 9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-fluorene dissolved in 100 ml of N,N-dimethylformamide containing a few crops of iron. After 5 minutes, 2 g of sodium hydroxide dissolved in 15 ml of water was added dropwise. The mixture was then dispersed in ether, repeatedly washed with water, dried with magnesium sulfate, and evaporated. The residue was column chromatographed through silica gel using hexane/ether (1:1) as the eluent. After the solvent was evaporated, 27.0 g (82%) of colorless liquid was obtained. MS (m/z): 582 (M<sup>+</sup>), 350, 337, 270, 203, 189, 176, 133, 103, 57.

- 21 -

#### EXAMPLE 7

Synthesis of 9,9-bis(5-cyano-5-methylhexyl)-2,7-dibromofluorene:

24.0 g of bromine was slowly added into 20.6 g of 9,9-bis(5-cyano-5-methylhexyl)-fluorene dissolved in 60 ml of N,N-dimethylformamide  
5 containing a few crops of iron. After 5 minutes, 2 g of sodium hydroxide dissolved in 15 ml of water was added dropwise. The mixture was then dispersed in ether, repeatedly washed with water, dried with magnesium sulfate, and evaporated. The residue was column chromatographed through silica gel using hexane/ether (1:1) as the eluent. After the solvent was  
10 evaporated, 25.6 g (90%) of light yellow liquid was obtained. MS (m/z): 570 (M<sup>+</sup>), 446, 367, 323, 281, 251, 207, 191, 176.

#### EXAMPLE 8

Synthesis of poly[9,9-bis(3,6-dioxaheptyl)fluorene-2,7-diyl] (BDOH-PF):

15 9,9-bis(3,6-dioxaheptyl)-2,7-dibromofluorene (5.0 g), triphenylphosphine (2.59 g), zinc dust (3.94 g), 2,2'-dipyridyl (0.13 g), and nickel chloride (0.11 g) were placed in a 100 ml flask and purged with nitrogen. N,N-dimethylformamide (40 ml) was added via syringe and the mixture was stirred at 70 °C for 2 days. The mixture was cooled, filtered,  
20 and dialyzed (MWCO=1,000) against methanol and water. The solid that precipitated was collected on filter paper and redissolved in THF. The solution was poured into water to effect precipitation of light yellow solid which was further purified by dissolution in tetrahydrofuran and precipitation in methanol. 0.74 g (21%) of light yellow solid was obtained. GPC  
25 determined molecular weight (polystyrene standard):  $M_w=214,900$ ,  $M_n=$

- 22 -

94,200, PD=2.3. Thin films spin cast from a solution in tetrahydrofuran has a UV-Vis absorption peak at 380 nm, photoluminescent emission peaks at 432, 450, and 540 nm, and photoluminescence quantum efficiency about 78% (relative to a dilute solution of coumarin 480 in ethanol whose quantum efficiency was reported to be 93%).

#### EXAMPLE 9

Synthesis of poly[9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-fluorene-2,7-diyl] (EHTOD-PF):

9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-2,7-dibromofluorene (4.0 g), triphenylphosphine (1.73 g), zinc dust: (2.18 g), 2,2'-dipyridyl (0.052 g), and nickel chloride (0.043 g) were placed in a 100 ml flask and purged with nitrogen. N.N-dimethylformamide (25 ml) was added via syringe and the mixture was stirred at 60-70 °C for 2 days. The mixture was cooled, filtered, and dialyzed (MWCO=1,000) against methanol and water. The solid that precipitated was collected on filter paper and redissolved in THF. The solution was poured into water to effect precipitation of light yellow solid which was further purified by dissolution in tetrahydrofuran and precipitation in methanol/water. 0.92 g (32%) of light yellow solid was obtained. GPC determined molecular weight (polystyrene standard):  $M_w=41,400$ ,  $M_n=21,100$ , PD=2.0. Thin films spin cast from a solution in tetrahydrofuran has a UV-Vis absorption peak at 378 nm, photoluminescent emission peaks at 430 and 450 nm, and photoluminescence quantum efficiency about 75% (relative to a dilute solution of coumarin 480 in ethanol whose quantum efficiency was reported to be 93%).



- 23 -

**EXAMPLE 10**

Synthesis of poly[9,9-bis(5-cyano-5-methylhexyl)-fluorene-2,7-diyl]  
(BCN-PF):

9,9-bis(5-cyano-5-methylhexyl)-2,7-dibromofluorene (3.92 g),  
5 triphenylphosphine (1.73 g), zinc dust: (2.18 g), 2,2'-dipyridyl (0.052 g),  
and nickel chloride (0.043 g) were placed in a 100 ml flask and purged with  
nitrogen. N.N-dimethylformamide (25 ml) was added via syringe and the  
mixture was stirred at 70 °C for 2 days. The mixture was cooled and poured  
into methanol. The solid that precipitated was collected on filter paper and  
10 redissolved in THF. The solution was filtered to remove residual zinc and  
then mixed with methanol to effect precipitation of light yellow solid which  
was further purified by dissolution in tetrahydrofuran and precipitation in  
methanol. 0.75 g (27%) of light yellow solid was obtained. GPC determined  
molecular weight (polystyrene standard):  $M_w=26,000$ ,  $M_n=13,700$ ,  
15  $PD=1.9$ . Thin films spin cast from a solution in tetrahydrofuran has a UV-  
Vis absorption peak at 378 nm, photoluminescent emission peaks at 428,  
450, and 525 nm, and photoluminescence quantum efficiency about 64%  
(relative to a dilute solution of coumarin 480 in ethanol whose quantum  
efficiency was reported to be 93%).

20 **EXAMPLE 11**

Synthesis of poly[9,9-bis(5-cyano-5-methylhexyl)-fluorene-2,7-diyl]  
(BCN-PF) using iron(III) chloride:

9,9-bis(5-cyano-5-methylhexyl)fluorene (4.7 g) dissolved in 8 ml of  
chloroform was added slowly into 7.41 g of ferric chloride dispersed in 55  
25 ml of chloroform at 0 °C. The mixture was stirred at 22 °C under nitrogen

- 24 -

protection for 2 days, and poured into methanol. The solid that precipitated was collected on filter paper and Soxlet extracted successively with methanol and tetrahydrofuran. The tetrahydrofuran extract was mixed with methanol to effect precipitation of light brown solid which was further purified by  
5 dissolution in tetrahydrofuran and precipitation in methanol. 1.09 g (26%) of light brown solid was obtained. GPC determined molecular weight (polystyrene standard):  $M_w=159,000$ ,  $M_n=61,900$ ,  $PD=2.6$ . Thin films spin cast from a solution in tetrahydrofuran has a UV-Vis absorption peak at 378 nm, photoluminescent emission peaks at 425, 450, and 525 nm, and  
10 photoluminescence quantum efficiency about 45% (relative to a dilute solution of coumarin 480 in ethanol whose quantum efficiency was reported to be 93%).

#### EXAMPLE 12

Synthesis of poly[9-hexyl-9-(5-cyano-5-methylhexyl)fluorene-2,7-diyl]  
15 (HCN-PF) using iron(III) chloride:

9-hexyl-9-(5-cyano-5-methylhexyl)-fluorene (1.86 g) dissolved in 5 ml of chloroform was added slowly into 7.41 g of ferric chloride dispersed in 25 ml of chloroform at 0 °C. The mixture was stirred at 22 °C under nitrogen protection for 3 days, and poured into methanol. The solid that  
20 precipitated was collected on filter paper and Soxlet extracted successively with methanol and tetrahydrofuran. The tetrahydrofuran extract was mixed with methanol to effect precipitation of light brown solid which was further purified by dissolution in tetrahydrofuran and precipitation in methanol. 0.59 g (32%) of light brown solid was obtained. Thin films spin cast from a  
25 solution in tetrahydrofuran has a UV-Vis absorption peak at 380 nm,

- 25 -

photoluminescent emission peaks at 422, 450, and 530 nm, and photoluminescence quantum efficiency about 62% (relative to a dilute solution of coumarin 480 in ethanol whose quantum efficiency was reported to be 93%).

5           **EXAMPLE 13**

          The polyfluorenes BDOH-PF, EHTOD-PF, BCN-PF, and HCN-PF are soluble in tetrahydrofuran, chloroform, chlorobenzene, toluene, N,N-dimethylformamide, N,N-dimethylacetamide, cyclopentanone, cyclohexanone, pyridine, and the like, up to a concentration of 1 gram of  
10   polymer per 10 ml of solvent. The resulting solutions are clear and colorless or light yellow. The solutions were used to spin-cast and dip-coat thin films which were colorless or light yellow and transparent. No crystal particles or other particles in the films were observed under an optical microscope. In particular, the polymer solutions of the concentration 2 gram polymer per  
15   100 ml of tetrahydrofuran were used to spin cast thin films on glass substrates. The spin speed was 1000 to 3000 rpm. The UV-visible absorption spectra of these thin films were taken and are displayed in Fig. 2. The absorption of the films in the visible range is small, confirming the transparency of the films. The absorption peaks are in the same range (378-  
20   380 nm), almost independent of the side groups.

**EXAMPLE 14**

          The photoluminescence spectra of the films described in example 13 were taken using a CCD array spectrophotometer. The emission color was blue-green for HCN-PF, green-blue for BCN-PF, sky blue for BDOH-PF,

- 26 -

and blue for EHTOD-PF. The photoluminescence quantum efficiency of these films were determined by using an integrating sphere to measure the total power of the emitted light from the samples; the resulting quantum efficiencies are shown in the Table below. Coumarin 480 dissolved in ethanol (1 mg coumarin 480 in 100 ml ethanol) with a photoluminescence efficiency of 93%, was used as the standard .

Table 1. Photoluminescence efficiency of poly(alkylfluorenes)

	Sample	PL efficiency (%)#
	BDOH-PF	78.4
10	EHTOD-PF	75.4
	HCN-PF	61.6
	BCN-PF (FeCl <sub>3</sub> )	45.4
	BCN-PF (Ni <sup>0</sup> )	64.0

# Spin-cast thin film, thickness approximately 1000 Å, optical density of approx. 1.

#### EXAMPLE 15

Light-emitting electrochemical cells (LECs) were fabricated using BDOH-PF on a transparent, indium-tin oxide (ITO) coated glass substrate.

Side groups which are attached to the BDOH-PF main chain contain ethylene-oxide moieties with molecular structure similar to that of PEO. These side groups serve multiple purposes. First, the side-group increases the solubility of BDOH-PF in common organic solvents. Second, the similarity of the molecular structure of the side groups of BDOH-PF to the

- 27 -

molecular structure of PEO implies compatibility of BDOH-PF with PEO. This enabled control of the morphology of the phase separation between the host EL polymer and PEO in the LEC. The compatibility between PEO and EL polymers is one of the major technical obstacles for polymer LECs. The  
 5 *built-in* ethylene oxide side groups help alleviate this problem.

A solution of 2% PF in cyclopentanone was prepared. The PF polymer to Li salt concentration are kept at 5.6:1 ratio. Polymer films of BDOH-PF were spin-cast onto the ITO/glass substrates, with film thicknesses approx. 1000-1500 Å. Aluminum electrode were vacuum  
 10 deposited onto the BDOH-PF films at  $10^{-6}$  torr vacuum. The device area was about 12mm<sup>2</sup>.

The LECs prepared in this way using BDOH-PF were uniform and bright. The operating lifetime was more than ten hours. LECs fabricated with this structure emitted sky blue light at a bias voltage greater than 2.8 V  
 15 and reached 200 cd/m<sup>2</sup> at 3.1 V and greater than 1000 cd/m<sup>2</sup> at 3.5 V. The measured external quantum efficiency of device was approx. 4% photons per electron injected. The power efficiency was approx. 12 lumen per watt.

The device characteristics recorded for these two bias conditions are summarized in the Table 2.

20

TABLE 2

BDOH-PF Blue LEC data

BDOH-PF LEC

BDOH-PF LEC

25

Bias (V)	3.1	3.5
Current (mA)	0.52	3.57
Light output (cd/sq-m)	200	1000

- 28 -

TABLE 2 (CONT.)

	Optical Power ( $\mu$ W)	34.2	180
	Photopic Sensitivity(0.87)	0.87	0.87
	Efficiency in Lumens / Watt	12.61	8.56
5	External Quantum Efficiency (%)	4%	2.80%

## EXAMPLE 16

Small amounts of PEO (ratio of 10 parts BDOH-PF to one part PEO) was added to enhance the turn-on response of the LEC. The morphology of the spin-cast films was changed. The device turn-on speed was improved. The current-voltage characteristic of the BDOH-PF LEC (with PEO), is shown in Fig. 5. The device turned-on at 2.5 volts and reached approximately 500 cd/m<sup>2</sup> brightness at 4 volts.

With addition of the PEO, the EL color changed to white. The device quantum efficiency was approx 2.5% photons/electron (external). This is the highest reported quantum efficiency of any organic/polymer white light-emitting device. The EL spectra of the white light-emitting LEC are shown in Fig. 6. EL spectra with RGB color filters are also shown.

## EXAMPLE 17

Light-emitting diodes were fabricated with BDOH-PF using ITO as the anode and calcium as the cathode; i.e. ITO/BDOH-PF/Ca. The BDOH-PF film was spin-cast at room temperature from CHCl<sub>3</sub> solution with 20mg/1ml ratio. Light emission was observed in forward bias for V greater than 15 V. The luminance reached 650 cd/m<sup>2</sup> at 40 V (approx. 130 mA/cm<sup>2</sup>). The EL

- 29 -

efficiency is greater than 0.5% for current greater than 1 mA/cm<sup>2</sup>, as shown in Fig. 3.

#### EXAMPLE 18

Example 17 was repeated with a relatively thin BDOH-PF film. The  
5 operation voltage of this device was reduced significantly. Light emission  
was detected for  $V > 5V$ ; the intensity reached 500 cd/m<sup>2</sup> at approx. 20 V.

#### EXAMPLE 19

Example 17 was repeated and the electroluminescence (EL) emission  
spectrum was measured as shown in Fig. 4. The EL emission has broader  
10 distribution than PL; the EL was shifted toward the yellow/red region  
relative to the photoluminescence spectrum.

#### EXAMPLE 20

Devices were fabricated with a PVK hole transport layer between the  
anode and the BDOH-PF layer; i.e. in the configuration ITO/PVK/BDOH-  
15 PF/Ca. Similar device performance (I-V, L-V, and device efficiency) were  
observed as described in Examples 17, 18, 19.

#### EXAMPLE 21

Poly[9-hexyl-9-(2'-ethyl;hexyl)-fluorene-2,7-diyl], (HEH-PF) was  
synthesized in a similar manner to HCN-PF as described in example 12.  
20 LEDs were fabricated with HEH-PF using ITO as the anode and calcium as  
the cathode; i.e. ITO/HEH-PF/Ca and ITO/PVK/HEH-PF/Ca. Similar  
device performance was observed as described in examples 17, 18, 19 and

- 30 -

20. For HEH-PF, the EL emission spectrum covered the entire visible region resulting in white light.

This example demonstrates that HEH-PF LEDs emit white light and can be used for full color displays by combining a matrix of the white color  
5 LED with a RGB color filter panel.

#### EXAMPLE 22


LEDs were fabricated with HCN-PF in the configurations of ITO/HCN-PF/Ca and ITO/PVK/HCN-PF/Ca. Similar device performance was observed to that described in examples 17 through 21. The device  
10 efficiency was 0.3-0.5% ph/el. Again the EL spectrum was shifted toward the yellow/ red relative to the PL spectrum.



- 31 -

What is claimed is:

1. A polyfluorene compound comprising from about 3 to about 10,000 repeat units of the formula



wherein R1 is an aliphatic group including at least one polar heteroatom-containing group and R2 is selected from the group consisting of hydrogen, alkyls and aliphatic groups including at least one polar heteroatom-containing group.

2. The polyfluorene compound of claim 1 wherein R2 is an alkyl.

3. The polyfluorene compound of claim 1 wherein R2 is a lower alkyl including at least one heteroatom-containing polar group.

4. The polyfluorene compound of claim 1 wherein the heteroatom-containing group R1 is selected from oxygen-containing groups, nitrogen-containing groups and sulfur-containing groups.

5. The polyfluorene compound of claim 4 wherein R1 is an alkylene ether.

6. The polyfluorene compound of claim 5 wherein R1 is 3,6-dioxaheptyl or 3,6,9-trioxadecyl.

- 32 -

7. The polyfluorene compound of claim 4 wherein R1 is a cyano alkyl.

8. The polyfluorene compound of claim 4 selected from the group consisting of poly(9,9-bis(3,6-dioxaheptyl)-fluorene-2,7diyl), poly(9-(2-ethylhexyl)-9-(3,6,9-trioxadecyl)-fluorene-2,7diyl), poly(9-hexyl-9-(5-cyano-5-methylhexyl)-fluorene-2,7diyl) and poly(9,9-bis(5-cyano-5-methylhexyl)-fluorene-2,7diyl).

9. In a light-emitting organic solid state device in which an active layer comprising an electrically activated luminescent organic polymer is positioned between a hole-injecting electrode and an electron-injecting electrode, the improvement comprising employing a polymer of claim 1 as the electrically activated luminescent organic polymer.

10. The light-emitting device of claim 9 configured as a light-emitting diode.

11. The light-emitting device of claim 9 configured as a light-emitting electrochemical cell.








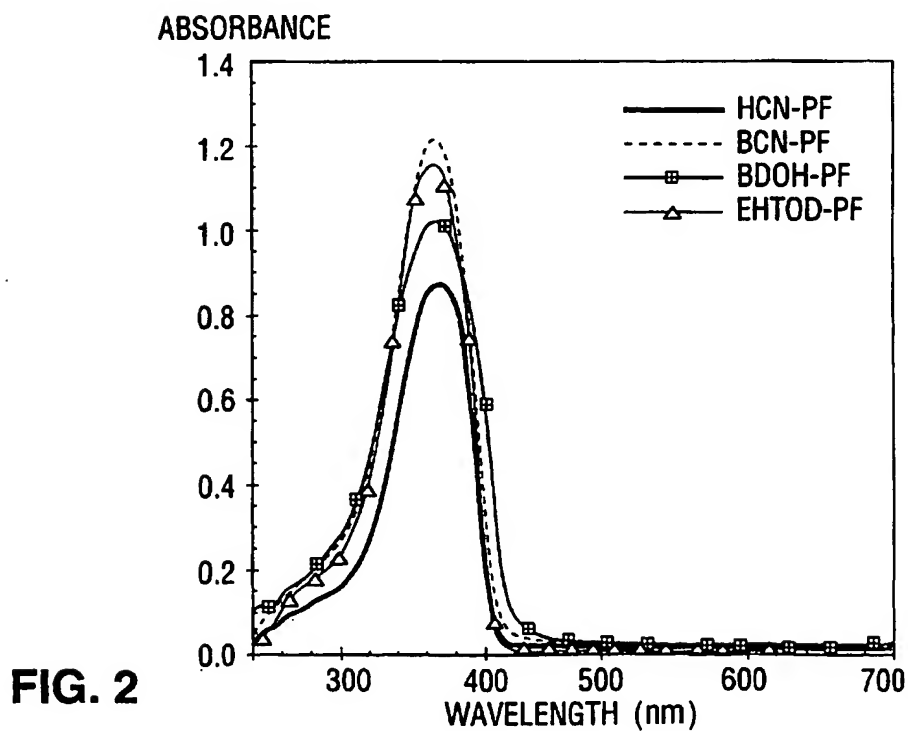
12. The light-emitting device of claim 11 wherein the active layer additionally comprises an ionic species source.

13. The light-emitting device of claim 11 wherein At least one of R1

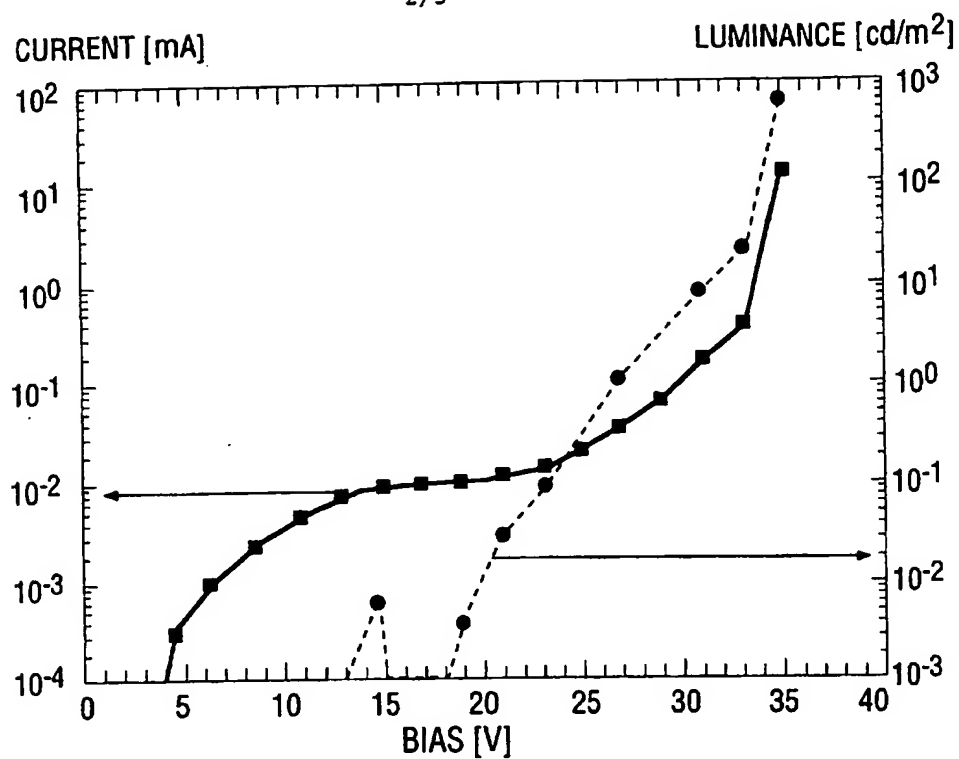
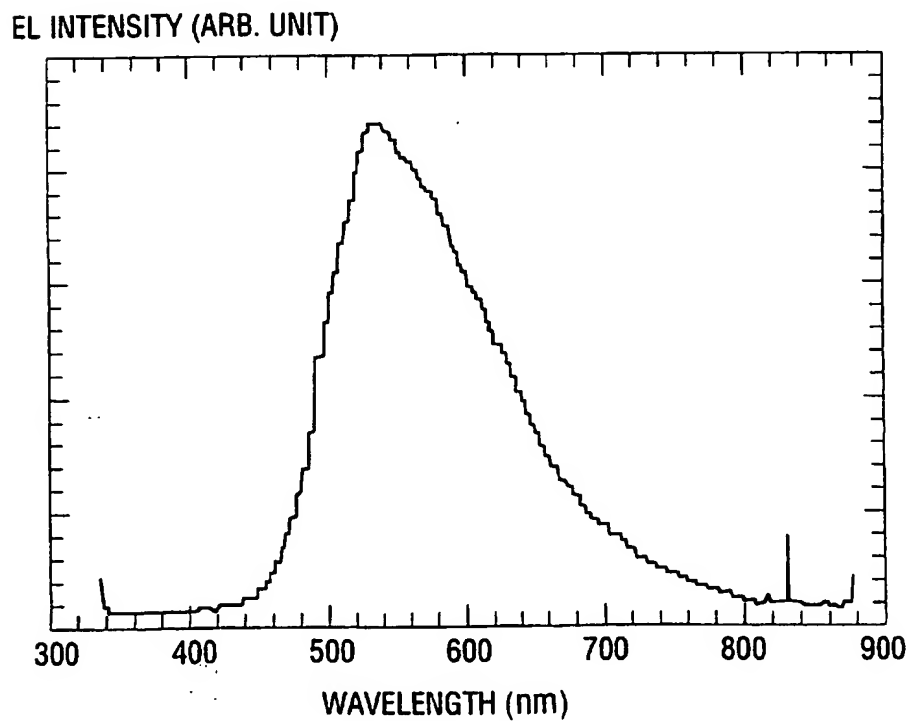
- 33 -

and R2 contains polar groups corresponding to mer units of a polymer electrolyte.

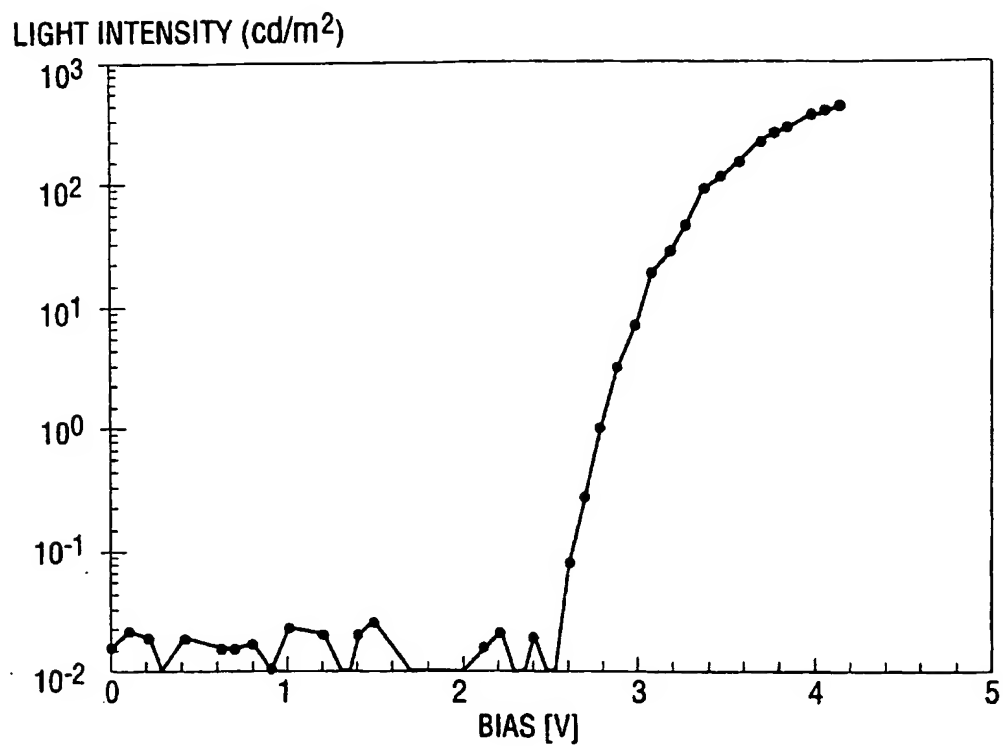
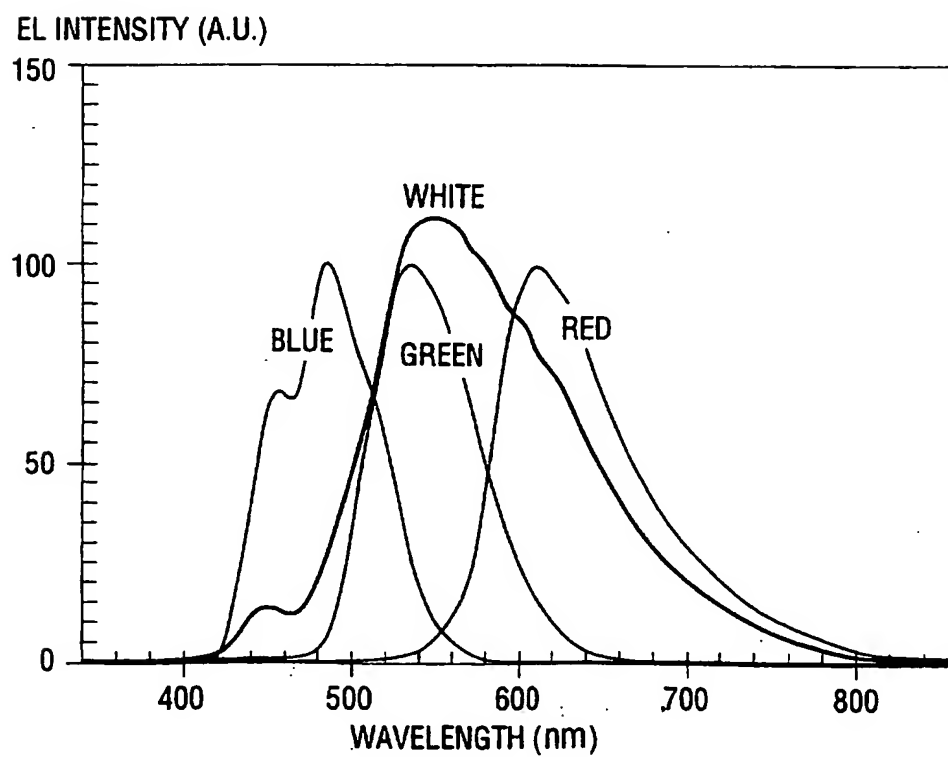
14. A method for generating light comprising applying a solid-state device activating voltage across the hole injecting electrode and electron  
5 injecting electrodes of the device of claim 9, thereby giving rise to light emission from the device's layer of electroluminescent organic polymer and detecting the emitted light.

**FIG. 1A****FIG. 1B****FIG. 1C****BDOH-PF****FIG. 1D****EHTOD-PF****FIG. 1E****HCN-PF****FIG. 1F****BCN-PF****FIG. 1G**

2/3

**FIG. 3****FIG. 4**

3/3

**FIG. 5****FIG. 6**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/03326

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H01L33/00 C08G61/00 C09K11/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C09K C08G H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 01871 A (THE REGENTS OF THE UNIVERSITY OF CALIFORNIA) 19 January 1995 see page 14, line 29 - page 15, line 14; claims 18,25	1,9
A	EP 0 259 229 A (ETAT FRANCAIS ET AL.) 9 March 1988 see claims	1,9
A	DATABASE WPI Section Ch, Week 9050 Derwent Publications Ltd., London, GB; Class A26, AN 90-372460 XP002034058 & JP 02 269 734 A (IDEMITSU KOSAN CO LTD) , 5 November 1990 cited in the application see abstract	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

30 June 1997

Date of mailing of the international search report

28.07.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Boeker, R

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No  
PCT/US 97/03326

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9501871 A	19-01-95	AU 7256594 A	06-02-95
EP 0259229 A	09-03-88	FR 2603288 A	04-03-88